



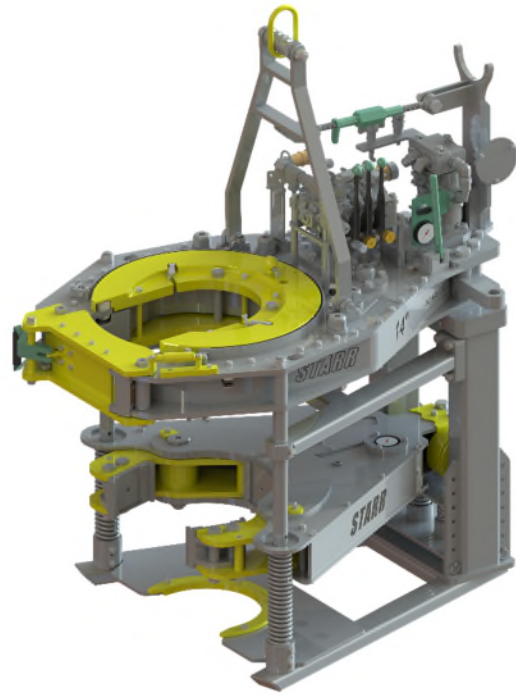

# 14" 75K SPECIFICATIONS

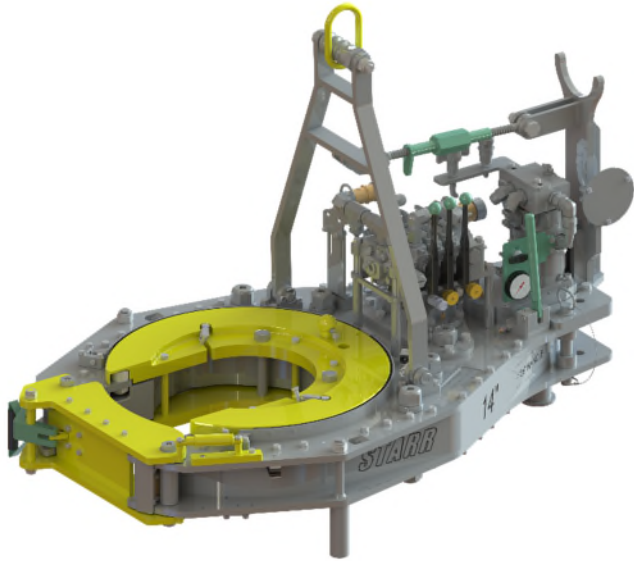

TYPICAL TESTED PERFORMANCE TORQUE (112.75.06.33.XX)					TYPICAL TESTED PERFORMANCE RPM (112.75.06.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb					
1000	30100	15000	5300	2600	10	<1	1	3	7
2000	60200	30100	10600	5300	20	1	2	7	15
2250	67700	33800	11900	5900	40	2	5	15	30
2500	75200	37600	13200	6600	60	4	8	23	46
<p><i>Disclaimer: Technical Values are +/- 5% of Listed Values</i>  <i>Speed 1 = Low (Hydraulic) / Low (Mechanical)</i>  <i>Speed 2 = High / Low</i>  <i>Speed 3 = Low / High</i>  <i>Speed 4 = High / High</i></p>									

14" 75K Tong	Stand Alone	With Backup
Capacity	6-5/8" - 14" (Tong)	7" - 15" (Backup)
Width	41.5" (105.4 cm)	46" (116.8 cm)
Length	65.3" (165.9 cm)	65.3" (165.9 cm)
Height	46.9" (119.1 cm)	80.1" (203.5 cm)
Weight (lb)	2360 (1070 kg)	3860 (1751 kg)
Hyd. System Rated Pressure	2500 psi	
Rated Torque	75,000 ft-lbs (67790 Nm)	
Handle Length	36" (91.4 cm)	



Starr Power Tongs, LLC.  
 2801 Youngsville Hwy  
 Youngsville, LA 70592  
 United States of America  
 Phone: +1-337-330-2631