



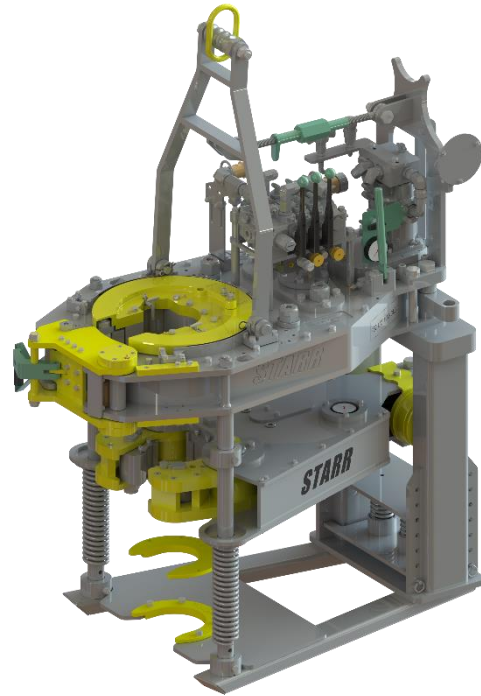

6-1/4" SPECIFICATIONS

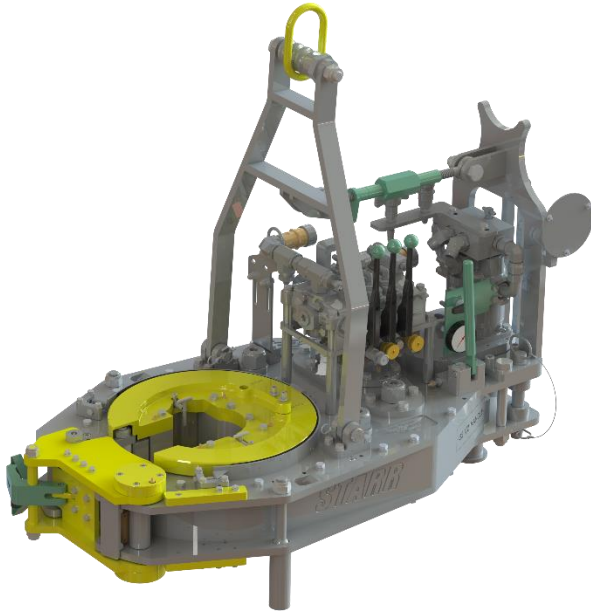

TYPICAL TESTED PERFORMANCE TORQUE (50.35.03.33.XX)					TYPICAL TESTED PERFORMANCE RPM (50.35.03.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb	10	1	3	8	17
1000	12000	6000	2100	1000	20	3	6	17	35
2000	24100	12000	4200	2100	40	6	12	35	70
2250	27100	13500	4700	2300	60	9	18	52	105
2500	30100	15000	5300	2600	<i>Disclaimer: Technical Values are +/- 5% of Listed Values</i> <i>Speed 1 = Low (Hydraulic) / Low (Mechanical)</i> <i>Speed 2 = High / Low</i> <i>Speed 3 = Low / High</i> <i>Speed 4 = High / High</i>				

6-1/4" Tong	Stand Alone	With Backup
Capacity	2-3/8" - 6-1/4" (Tong)	2-3/8" - 7" (Backup)
Width	29.5" (75 cm)	33.5" (85 cm)
Length	55.6" (141.2 cm)	55.9" (142 cm)
Height	47.6" (121 cm)	77.9" (197.9 cm)
Weight (lb)	1,720 (780 kg)	3060 (1388 kg)
Hyd. System Rated Pressure	2,500 psi	
Rated Torque	30,000 ft-lbs (47,453 Nm)	
Handle Length	32.5" (82.6 cm)	



Starr Power Tongs, LLC.
 2801 Youngsville Hwy
 Youngsville, LA 70592
 United States of America
 Phone: +1-337-330-2631